



INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁶ : H04Q 7/38		A2	(11) International Publication Number: WO 99/57932
			(43) International Publication Date: 11 November 1999 (11.11.99)

<p>(21) International Application Number: PCT/FI99/00366</p> <p>(22) International Filing Date: 3 May 1999 (03.05.99)</p> <p>(30) Priority Data: 980982 4 May 1998 (04.05.98) FI</p> <p>(71) Applicant (for all designated States except US): NOKIA NETWORKS OY [FI/FI]; Keilalahdentie 4, FIN-02150 Espoo (FI).</p> <p>(72) Inventors; and</p> <p>(75) Inventors/Applicants (for US only): KÄRNÄ, Juha [FI/FI]; Tontunmäentie 31 A 1, FIN-02200 Espoo (FI). HOTTINEN, Ari [FI/FI]; Ristiniementie 4 O 30, FIN-02320 Espoo (FI). HELENIUS, Jyri [FI/FI]; Timpurinkuja 1 A 15, FIN-02600 Espoo (FI).</p> <p>(74) Agent: PATENTTITOIMISTO TEKNOPOLOIS KOLSTER OY; c/o Kolster Oy AB, Iso Roobertinkatu 23, P.O. Box 148, FIN-00121 Helsinki (FI).</p>	<p>(81) Designated States: AE, AL, AM, AT, AT (Utility model), AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, CZ (Utility model), DE, DE (Utility model), DK, DK (Utility model), EE, EE (Utility model), ES, FI, FI (Utility model), GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SK (Utility model), SL, TJ, TM, TR, TT, UA, UG, US, UZ, VN, YU, ZA, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SL, SZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).</p> <p>Published <i>In English translation (filed in Finnish). Without international search report and to be republished upon receipt of that report.</i></p>
---	--

(54) Title: METHOD OF MEASURING SIGNAL TIMING, AND RADIO SYSTEM

(57) Abstract

The invention relates to a method of measuring signal timing and a CDMA radio system implementing the method. Data on at least one code channel transmitted by a neighbour base station (104, 106) is conveyed to a terminal (100) via a serving base station (102). On the basis of these data, the terminal (100) determines at least the spreading code of each said code channel and an estimate of the symbol timing in respect of the timing of the serving base station (102). The terminal utilizes at least some of the code channels of the neighbour base station (104, 106) to measure the signal timing of the neighbour base station (104, 106). On the basis of the timing, e.g. the location of the terminal (100) is determined.

The diagram illustrates a radio system with three base stations (BS) and one mobile station (MS). A serving base station (BS 102) is connected to a base station controller (BSC 108). Two neighbour base stations (BS 104 and BS 106) are also connected to the BSC 108. A mobile station (MS 100) is shown receiving signals from BS 102, BS 104, and BS 106. The timing differences between the signals are labeled as $\Delta T1$ (from BS 102), $\Delta T2$ (from BS 104), and $\Delta T3$ (from BS 106).

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav	TM	Turkmenistan
BF	Burkina Faso	GR	Greece		Republic of Macedonia	TR	Turkey
BG	Bulgaria	HU	Hungary	ML	Mali	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MN	Mongolia	UA	Ukraine
BR	Brazil	IL	Israel	MR	Mauritania	UG	Uganda
BY	Belarus	IS	Iceland	MW	Malawi	US	United States of America
CA	Canada	IT	Italy	MX	Mexico	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NE	Niger	VN	Viet Nam
CG	Congo	KE	Kenya	NL	Netherlands	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NO	Norway	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's	NZ	New Zealand		
CM	Cameroon		Republic of Korea	PL	Poland		
CN	China	KR	Republic of Korea	PT	Portugal		
CU	Cuba	KZ	Kazakstan	RO	Romania		
CZ	Czech Republic	LC	Saint Lucia	RU	Russian Federation		
DE	Germany	LI	Liechtenstein	SD	Sudan		
DK	Denmark	LK	Sri Lanka	SE	Sweden		
EE	Estonia	LR	Liberia	SG	Singapore		

METHOD OF MEASURING SIGNAL TIMING, AND RADIO SYSTEM

FIELD OF INVENTION

The field of the invention are radio systems and, more particularly, a
5 CDMA radio system. The invention relates to a method of measuring signal
timing to be used in the CDMA radio system comprising at least three base
stations and a terminal, which multiply a signal by a spreading code, and in
which method the transmission of a base station comprises various code
10 channels transmitted by different spreading codes, on one of which code
channels a predetermined symbol sequence is transmitted, and in which
method the terminal is in connection with at least one base station, on whose
timing the terminal stores data.

The invention also relates to a radio system, which is a CDMA radio
system in particular, comprising at least three base stations and a terminal
15 which are arranged to multiply a signal by a spreading code, in which radio
system the transmission of a base station comprises various code channels
transmitted by different spreading codes, at least one of which code channels
comprises a predetermined symbol sequence, and the terminal is in
connection with at least one serving base station, on whose timing the terminal
20 stores data.

BACKGROUND OF THE INVENTION

It is important to determine the precise propagation time delay for a
received signal in order to detect the signal and to locate a terminal, for
25 example. In order for the terminal to synchronize itself to the transmission of a
base station, each base station transmits a synchronizing signal on a sync
channel. The signal on the sync channel can be demodulated and detected
each time when a pilot signal is identifiable. On the sync channel, data on the
base station, the power and phase of the pilot signal and the amount of uplink
30 interference is transferred. Detecting symbols on a traffic channel is possible
when the connection between a transmitter and a receiver is synchronized.
The synchronized connection for its part means that the terminal is aware of
the propagation time delay for the signal.

In prior art solutions, code channels whose direction of transmission
35 is from a base station to a subscriber station, e.g. pilot channels, can be used

for synchronizing. The subscriber station can seek the code phase and then synchronize itself to the transmission of the base station and thus determine the signal timing of the base station. In the reverse direction of transmission from a subscriber station to a base station, the subscriber station begins
5 transmitting and the base station seeks the code phase and determines the signal timing of the terminal. In the direction of transmission from a subscriber station to a base station, a problem arises which is due to the distance between a subscriber station and a base station, i.e. a near-far problem. In locating a terminal, this problem is called a coverage problem. A terminal
10 located close to one base station is outside coverage areas of other base stations and it is not capable of hearing other base stations because of the interfering transmission of the nearby base station. As the travel time of a signal between the terminal and at least three base stations cannot be measured, the location of the terminal cannot thus be determined either.

15

BRIEF DESCRIPTION OF THE INVENTION

It is thus an object of the invention to provide a method and an apparatus implementing the method, in such a way that the above problems can be eliminated. This is achieved by a type of method disclosed in the
20 introduction, which is characterized by conveying data on at least one code channel transmitted by at least one neighbour base station via a serving base station to the terminal, the terminal determining on the basis of said data the spreading code of at least one said code channel and an estimate of the symbol timing of each code channel in respect of the timing of the serving
25 base station, and the terminal utilizing on the basis of these data on the code channels at least some of the code channels of the neighbour base station to measure the signal timing of the neighbour base station.

The system of the invention is characterized in that the serving base station is arranged to convey data on at least one code channel
30 transmitted by at least one neighbour base station, the terminal is arranged to determine on the basis of said data at least the spreading code of at least one said code channel and an estimate of the symbol timing of each code channel in respect of the timing of the serving base station, and on the basis of data on the code channels the terminal is arranged to utilize at least some of the code
35 channels of the neighbour base station to measure the signal timing of the neighbour base station.

The method and system of the invention provide a plurality of advantages. Coverage is improved and a terminal can also synchronize itself to the transmission of neighbour base stations, which enables the locating of the terminal.

5

BRIEF DESCRIPTION OF THE DRAWINGS

The invention will now be described in greater detail in connection with the preferred embodiments, with reference to the attached drawings, in which

- 10 Figure 1 shows a radio system,
 Figure 2 shows traffic channels,
 Figure 3 shows a block diagram of a receiver and
 Figure 4 shows a block diagram of a RAKE receiver.

15 DETAILED DESCRIPTION OF THE INVENTION

The solution of the invention is applicable to a WCDMA radio system (Wideband Code Division Multiple Access) in particular, yet without restricting thereto.

- Figure 1 shows a radio system comprising a terminal 100, three
20 base stations 102 to 106 and a base station controller 108. In this case, the
terminal 100, which is preferably a mobile phone, can be considered primarily
being in connection with the base station 102. Neighbour base stations of the
base station 102 are the base stations 104 and 106. All these base stations
102 to 106 share preferably the same base station controller 108, from which
25 there is a further connection via e.g. a mobile services switching centre (not
shown in Figure 1) to the other parts of the mobile telephone network and to
other telephone networks. All the other parts of the radio system except the
terminals 100 are defined as the network part of the radio system.

- To measure the terminal location, the travel time of a signal
30 between the terminal and at least three base stations is needed. At first, the
terminal measures the time of arrival, TOA, of a signal transmitted by each
base station. Time differences between the signals of the base stations TDOA
(Time Difference Of Arrival) or OTD (Observed Time Difference) can be
detected by calculating the differentials of the times of arrival TOA of the base
35 stations, when the time differences also indicate the distances between the

base stations and the terminal. When the distances between the terminal and at least three base stations is known, the terminal location can be determined unambiguously. In the CDMA system, the time of arrival can be determined by utilizing the synchronization of the spreading code. When a given chip of the spreading code (a chip is a bit of the spreading code) at the terminal appears at the instant t_1 and the same chip at the base station appears at the instant t_2 , the travel time of the signal between the terminal and the base station is $t_2 - t_1$. The terminal measures the time t_1 and the base station measures the time t_2 . In the solution of the invention, the terminal clock need not be synchronized with the clocks of the base stations. When the terminal transmits a so-called round-trip signal to the base station and the base station replies to this signal, the effect of the time difference between the terminal and the base station can be eliminated. If the transmission of the base stations has not been synchronized and the time differences between the base stations are not known, the round-trip must be measured from all the base stations whose signal timing the terminal measures. In a synchronized network, or if the time differences between the base stations are known, a round-trip signal is not needed for employing the TDOA method based on the time differences to determine a location. In the TOA method based on propagation time delays, a round-trip signal is only needed for the serving base station.

Even if the network was synchronized or the timing differences between the base stations were known, the round-trip signal to the serving base station can be used in determining the range for the propagation time delay to the other base stations. The terminal first measures the distance to the serving base station by using the round-trip signal. If the distance to the serving base station is d_1 , then the distance between the neighbour base station and the terminal is:

$$d_{12} - d_1 - e \leq d_2 \leq d_{12} + d_1 + e$$

where d_{12} is the distance between the serving base station and the neighbour base station and e is the accuracy of the measurement d_1 . The range of the delay established this way can be utilized in estimating the propagation time delay. The range deviation of the distance between the terminal and the neighbour base station is $2(d_1 + e)$, which corresponds to $2(d_1 + e)/(c \cdot T_c)$ as chips, where T_c is the duration of the chip and c is the velocity of electromagnetic radiation.

In the solution of the invention, the terminal 100 is at first in connection with at least one base station (in Figure 1, with the base station 102). At request of the terminal 100 or the network part of the radio system, the neighbour base stations 104, 106 of the base station 102 serving the terminal 100 transmit to the terminal 100 data on the transmitted code channels, an example of which is a traffic channel in particular. On the basis of the received data, the terminal 100 can also utilize some other than the sync channel in synchronizing, whereby it is possible to measure the signal timing of the neighbour base stations 104, 106 on higher interference and noise levels than in the solutions solely based on the use of the sync channel, because also the energy of a signal of other than the sync channel can be used. It is especially preferable to utilize the parts of the code channels in which a known signal is transmitted, e.g. regularly transmitted reference i.e. pilot symbols. Thus, data modulation can be eliminated from these parts without decision feedback, and a so-called coherent averaging or filtering can be used for the measured estimate of the impulse response of the channel. Let us now turn to the solution of the invention in case of using pilot symbols of the code channel.

An example of the content of the code channels transmitted by a base station is shown as a function of time in Figure 2. In this example, predetermined pilot symbols 200 are transmitted on three different traffic channels CH1, CH2 and CH3 at different instances. In order to be capable of making use of the pilot symbols 200, the terminal has to be aware of the time difference Tslot between the pilot symbols of the code channel in respect of the timing of the serving base station. On the traffic channel, besides data 204 also a transmission power symbol TPC (Transmission Power Control) is transmitted, by means of which symbol the base station can request the terminal to change its transmission power.

In order to make use of the signals of the code channel, the terminal 100 has to have data both on the time difference Tslot between the pilot symbols 200 and on the spreading code, spreading coefficient and reference symbols of the code channel. The terminal 100 needs further an estimate of the phase of the spreading code and of the location of the reference symbols in a timeslot, which data the base station 102 serving the terminal 100, the base station controller 108 or some other unit in the fixed network part requests of the neighbour base station 104, 106. The neighbour

base station 104, 106 transmits these data to the serving base station 102 preferably via the fixed network part from at least one of its code channels, which has/have the highest transmission power in the direction of the base station 102 serving the terminal. The base station 102 serving the terminal 100
5 transmits these data further to the terminal 100. Data on the signal timing are given to the terminal 100 preferably in respect of the timing of the serving base station 102. If the neighbour base station 104, 106 does not transmit a sufficient amount of code channels for the timing measurement to succeed, e.g. due to low congestion, the neighbour base station 104, 106 can add more
10 channels to the transmission for the time the terminal 100 is measuring the channels. This can also happen at request of the terminal 100. It is the signal timing of these channels that is used in the inventive solution to locate the terminal 100. On these channels used particularly in locating the terminal 100, known reference symbols are preferably transmitted. When a radio system is
15 only slightly congested, more channels can be added without substantially disturbing data transmission of other terminals. All the timings that are conveyed by the fixed network are preferably in respect of the timing of the serving base station 102.

Let us now take a closer look on a receiver of the terminal in Figure
20 3 applicable to the solution of the invention. The receiver comprises firstly an antenna 280, radio frequency parts 282 and an analogue-to-digital converter 284. A transmitted signal is received by the antenna 280, from which the signal travels to the radio frequency parts 282 where a quadrature demodulation is performed. In quadrature demodulation, the received signal is
25 divided into two parts, the first of which is multiplied by a radio-frequency cosine carrier wave, which has the form $\cos(\omega_c t)$. The second part of the signal is multiplied by a phase-shifted carrier wave, which can be expressed such that the signal is multiplied by a sin carrier wave, which has the form $\sin(\omega_c t)$. Thus, the multiplication of signals employs carrier waves, between
30 which there is a $\pi/2$ phase shift. As the different parts of the signal are orthogonal to each other due to the $\pi/2$ phase shift, data parts can be expressed in a complex manner. Thus, the received signal U can be expressed in the form $U = I + jQ$, where I is the first data part, Q is the second data part and j is an imaginary unit. The quadrature-demodulated signal parts
35 I , Q are changed in the analogue-to-digital converter 284 to complex digital samples.

A filter 300 arranged to the code of the received signal is a FIR filter (Finite Impulse Response), whose weight coefficients are directly derived from the spreading code of the used signal. The arranged filter 300 outputs the correlation of each signal received per each signal sample by means of one
5 delay to be measured along with the spreading code, which is loaded to the arranged filter 300 from a code generator 302. The arranged filter 300 comprises N taps, which corresponds to the delay area to be measured. As N signal samples have been driven through the arranged filter 300, the weight coefficients remaining unchanged, N correlation values have developed,
10 preliminarily indicating an estimate of the impulse response of the channel in vector format. From the preliminary estimate of the impulse response, the effect of data modulation in a multiplier 306 is eliminated, in which multiplier the preliminary estimate of the impulse response is multiplied by a predetermined symbol sequence derived from a symbol generator 304. Thus,
15 the estimate of the impulse response is made, and its biggest values generate delay estimations for multipath components of the signal. As the amount of noise in the signal is very high, before generating delay estimations, a series of consecutive estimates of the impulse response has to be filtered in calculating means 308 in order to establish reliable delay estimations. This is
20 accomplished by loading the weight coefficients of the arranged filter 300 to the next N samples of the spreading code and by averaging the N-long impulse response established this way with the previous estimates of the impulse response. After the coherent averaging according to the invention is performed for the estimates of the impulse response, the delay estimations for
25 the received signal can in principle be made. In the described receiver solution, delay estimations are, however, still specified by further processing. It is to be noticed that although the term coherent averaging is in this description connected to the estimates of the impulse response, any known filtering of the estimates of the impulse response, e.g. an IIR-based filtering (Infinite Impulse
30 Response), can be used instead of the averaging in the receiver implementing the inventive solution. If several code channels are used for measuring timing, their known symbol sequences can be utilized by loading to the arranged filter at each instant of time the coefficients corresponding to the spreading code of the code channel by which spreading code reference symbols are received at
35 that moment. If there is a sufficient amount of code channels in use and their time differences Tslot span the whole transmission period of the reference

symbols, the terminal can after the arranged filter constantly use a signal from which data modulation can be eliminated. The estimates of the impulse response generated in this manner can be coherently averaged, providing that the code channels to be used in measuring timing are transmitted from the same antenna of the base station, whereby they proceed along the same radio channel.

A complex IQ signal proceeds coherently from the averaging calculating means 308 to selecting means 310, at which also an output signal of the arranged filter 300 directly arrives. The selecting means 310 can thus be used for deciding, whether or not to utilize the coherent averaging. Irrespective of the fact, whether to directly select the output signal of the filter 300 or to use the coherently averaged signal components, the signal in IQ format is squared (I^2+Q^2) in means 312 before the averaging in means 314 to eliminate data modulation and phase error. As data modulation, e.g. a QPSK modulation (Quadrature Phase Shift Keying) is employed. The averaging which is performed after the selector 310 is called incoherent averaging. Employing only incoherent averaging according to the prior art has the disadvantage that besides the signal, also the noise in the output of the arranged filter 300 is squared, and thus the signal-to-noise ratio does not substantially improve after the averaging. A mere incoherent averaging helps, however, to estimate the peaks more reliably. In coherent averaging, the squaring is performed only after the coherent averaging. This requires, however, that the transmitted symbols, preferably pilot symbols, are predetermined, whereby data modulation can be eliminated from the samples.

In practice, a frequency error between the transmitter and oscillators (not shown in the figures) in the radio frequency means 282 of the receiver and the Doppler shift in the signal caused by a radio channel create phase rotating of signal samples, and so the coherent averaging time cannot be very long, e.g. about 1 ms maximum. In this case, a coherently averaged estimate of the impulse response can be squared and further averaged incoherently at a longer period of time (more than 1 ms) in the means 314. As the estimate of the impulse response proceeds to a delay estimator 316, the delay estimator 316 seeks the peaks of the estimate of the impulse response representing the most important delays of the multipath-propagated signal. The shortest delay often corresponds to the time the signal has taken to travel the direct line of sight distance. In this way, the terminal can measure the time

of arrival TOA (Time Of Arrival) of the signals of the base stations and the observed time difference OTD (Observed Time Difference) between the signals. The receiver is controlled by a control unit 318 and blocks 300 to 318 form a delay block 298, which can be a part of a RAKE receiver.

5 Figure 4 shows a block diagram of a RAKE receiver. The received signal travels from the antenna 280 through the radio frequency means 282 and the analogue-to-digital converter 284 as in Figure 3. Thereafter, a complex signal travels to the delay block 298, which is illustrated in more detail in Figure 3, and to RAKE branches 400 to 404 of the RAKE receiver. The
10 blocks 400 to 404 typically comprise a code generator and an arranged filter to decode the spreading code, and each block 400 to 404 is arranged to edit the spreading-coded signal received at different delays. The delay block 298 sets the delays of the RAKE branches 400 to 404, by which the spreading coding is decoded. After the spreading codings of the signals received by the RAKE
15 branches 400 to 404 have been decoded, different signal components of the multipath-propagated signal are combined in a diversity combiner 406, after which the baseband processing of the signal is continued, but the further processing is not substantial for the inventive solution. In the receiver, the amplification and frequency of the radio frequency means 282 is preferably
20 adjusted by means of automatic gain control means 410 and by means of automatic frequency control means 412.

When it comes to digital signal manipulation in particular, the solutions of the invention can be implemented by e.g. ASIC or VLSI circuits (Application-Specific Integrated Circuit, Very Large Scale Integration). The
25 procedures to be performed are preferably implemented as programs based on microprocessor technology.

Although the invention has been described above with reference to the example according to the attached drawings, it is obvious that the invention is not restricted thereto, but may be modified in a variety of ways
30 within the scope of the inventive idea disclosed in the attached claims.

CLAIMS

1. A method of measuring signal timing to be used in the CDMA radio system comprising at least three base stations (102 to 106) and a terminal (100), which multiply a signal by a spreading code, and in which
5 method the transmission of a base station comprises various code channels (CH1 to CH3) transmitted by different spreading codes, on one of which code channels a predetermined symbol sequence (200) is transmitted, and in which method the terminal (100) is in connection with at least one base station (102), on whose timing the terminal (100) stores data, **characterized** by
10 conveying data on at least one code channel (CH1, CH2, CH3) transmitted by at least one neighbour base station (104, 106) via a serving base station (102) to the terminal (100),
the terminal (100) determining on the basis of said data the spreading code of at least one code channel (CH1, CH2, CH3) and an
15 estimate of the symbol timing of each code channel (CH1, CH2, CH3) in respect of the timing of the serving base station (102), and
the terminal (100) utilizing on the basis of these data on code channels at least some of the code channels (CH1, CH2, CH3) of the neighbour base station (104, 106) to measure the signal timing of the
20 neighbour base station (104, 106).
2. A method as claimed in claim 1, **characterized** by the terminal (100) utilizing at least some of the predetermined symbol sequences (200) transmitted on the code channels (CH1, CH2, CH3) by the neighbour base station (104, 106) to measure the signal timing of the neighbour base
25 station (104, 106).
3. A method as claimed in claim 1, **characterized** by the base station (102) serving the terminal (100), the base station controller (108) or some other unit in the fixed network requesting data on the code channels of at least one neighbour base station (104, 106) via the fixed network part.
- 30 4. A method as claimed in claim 1, **characterized** by the neighbour base station (104, 106) selecting for data transmission code channels (CH1 to CH3) which have the highest transmission power in the direction of the base station (102) serving the terminal (100).
5. A method as claimed in claim 1, **characterized** by the
35 timing measurement also utilizing the sync channel.

6. A method as claimed in claim 1, **characterized** by the terminal (100) measuring the signal timing from at least three base stations (102 to 106) to locate the terminal (100).

7. A method as claimed in claim 6, **characterized** by the
5 terminal (100) transmitting data on the signal timing of the base stations to the fixed network part of the radio system to locate the terminal (100).

8. A method as claimed in claim 6, **characterized** by the terminal (100) determining its own location by means of the signal timing.

9. A method as claimed in claim 1, **characterized** by the
10 terminal (100) measuring the signal timing with some other neighbour base station (104, 106), if the signal timing fails with one neighbour base station (104, 106).

10. A method as claimed in claim 1, **characterized** by the neighbour base station (104, 106) adding to its transmission at least one code
15 channel (CH1, CH2, CH3) on which a known symbol sequence is transmitted to measure the signal timing of the terminal (100), and the neighbour base station (104, 106) conveying via the serving base station (102) to the terminal (100) data, on the basis of which the terminal (100) uses said code channel (CH1, CH2, CH3) to measure the signal timing.

20 11. A method as claimed in claim 2, **characterized** by the terminal (100) receiving predetermined symbols (200) on several code channels (CH1 to CH3) of the same base station (102 to 106), the symbols being transmitted time-division multiplexed by the base station (102 to 106) on several channels (CH1 to CH3) in such a way that the predetermined symbols
25 (200) of different code channels arrive at substantially different times.

12. A method as claimed in claim 2, **characterized** by the terminal (100) decoding the received spreading coding of the signal of the code channel, multiplying the signal by a predetermined symbol sequence (200) to generate an estimate of the impulse response of the channel and
30 measuring the timing of the received signal by coherently averaging the estimates of the impulse response.

13. A radio system, which is a CDMA radio system in particular, comprising at least three base stations (102 to 104) and a terminal (100) which are arranged to multiply a signal by a spreading code, in which radio system
35 the transmission of a base station comprises various code channels (CH1 to CH3) transmitted by different spreading codes, at least one of which code

channels comprises a predetermined symbol sequence (200), and the terminal (100) is in connection with at least one serving base station (102), on whose timing the terminal (100) stores data, **characterized** in that the serving base station (102) is arranged to convey data on at least one code channel (CH1, CH2, CH3) transmitted by at least one neighbour base station (104, 106),

the terminal (100) is arranged to determine on the basis of said data at least the spreading code of at least one said code channel (CH1, CH2, CH3) and an estimate of the symbol timing of each code channel (CH1, CH2, CH3) in respect of the timing of the serving base station (102), and

on the basis of data on code channels the terminal (100) is arranged to utilize at least some of the code channels (CH1, CH2, CH3) of the neighbour base station (104, 106) to measure the signal timing of the neighbour base station (104, 106).

14. A radio system as claimed in claim 13, **characterized** in that the terminal (100) is arranged to utilize at least some of the predetermined symbol sequences (200) transmitted on the code channels (CH1, CH2, CH3) by the neighbour base station (104, 106) to measure the signal timing of the neighbour base station (104, 106).

15. A radio system as claimed in claim 13, **characterized** in that the base station (102) serving the terminal (100), the base station controller (108) or some other unit in the fixed network part is arranged to request data on the code channels of at least one neighbour base station (104, 106) via the fixed network part.

16. A radio system as claimed in claim 13, **characterized** in that the neighbour base station (104, 106) is arranged to select for data transmission code channels (CH1 to CH3) which have the highest transmission power in the direction of the base station (102) serving the terminal (100).

17. A radio system as claimed in claim 13, **characterized** in that the terminal (100) is arranged to utilize also the sync channel in measuring the timing.

18. A radio system as claimed in claim 13, **characterized** in that the terminal (100) is arranged to measure the signal timing from at least three base stations (102 to 106) to locate the terminal (100).

19. A radio system as claimed in claim 18, **characterized** in that the terminal (100) is arranged to transmit data on the signal timing of the signals of the base stations (102 to 106) to the fixed network part of the radio system to locate the terminal (100).

5 20. A radio system as claimed in claim 18, **characterized** in that the terminal (100) is arranged to determine its own location by means of the signal timing.

 21. A radio system as claimed in claim 13, **characterized** in that the terminal (100) is arranged to measure the signal timing with some
10 other base station (102 to 106), if the timing measurement fails with one base station (102 to 106).

 22. A radio system as claimed in claim 13, **characterized** in that the neighbour base station (104, 106) is arranged to add to its transmission at least one code channel (CH1, CH2, CH3) comprising a known
15 symbol sequence to measure the timing of the terminal (100), and the neighbour base station (104, 106) is arranged to convey via the serving base station (102) to the terminal (100) data the terminal (100) uses in measuring the timing of the code channel (CH1, CH2, CH3).

 23. A radio system as claimed in claim 14, **characterized** in
20 that the terminal is arranged to receive the predetermined symbols (200) on various code channels (CH1, CH2, CH3) of the same base station (102 to 106), the symbols being transmitted time-division multiplexed by the base station (102 to 106) on various channels (CH1 to CH3) in such a way that the predetermined symbols (200) of different code channels arrive at substantially
25 different times.

 24. A radio system as claimed in claim 14, **characterized** in that the terminal (100) is arranged to decode the received spreading coding of the signal of the code channel, to multiply the signal by the predetermined symbol sequence (200) to generate an estimate of the impulse response of
30 the channel and to measure the timing of the received signal by coherently averaging the estimates of the impulse response.

1/2

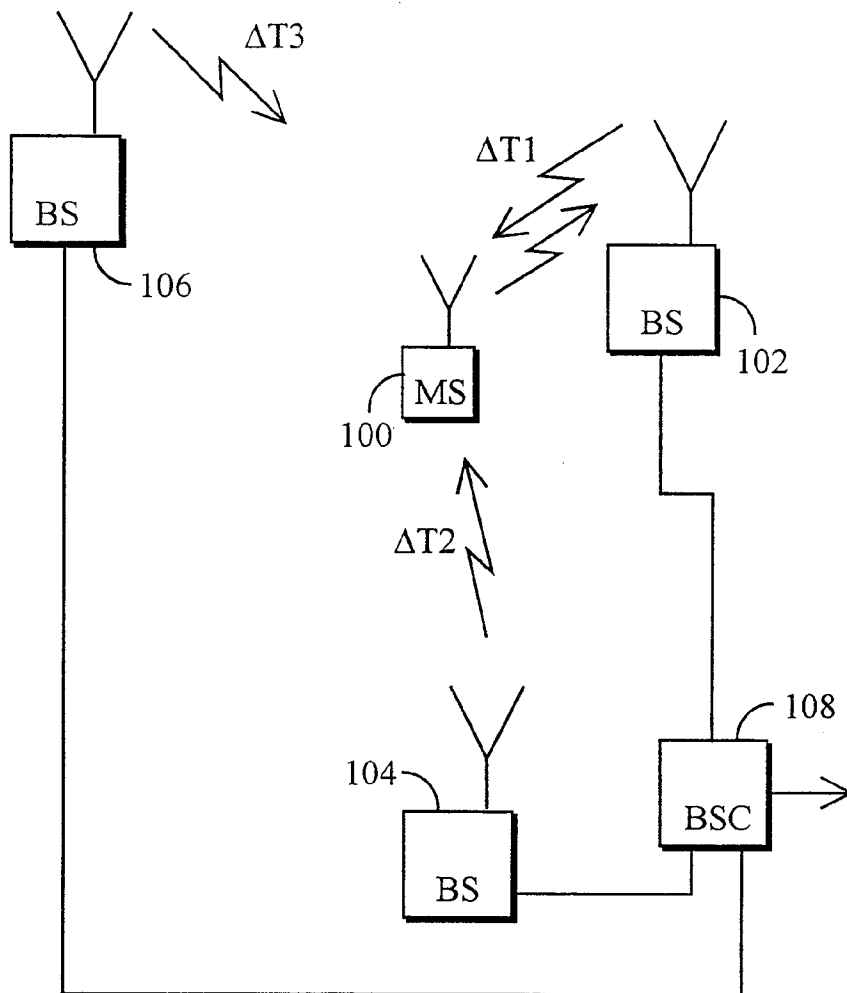


FIG. 1

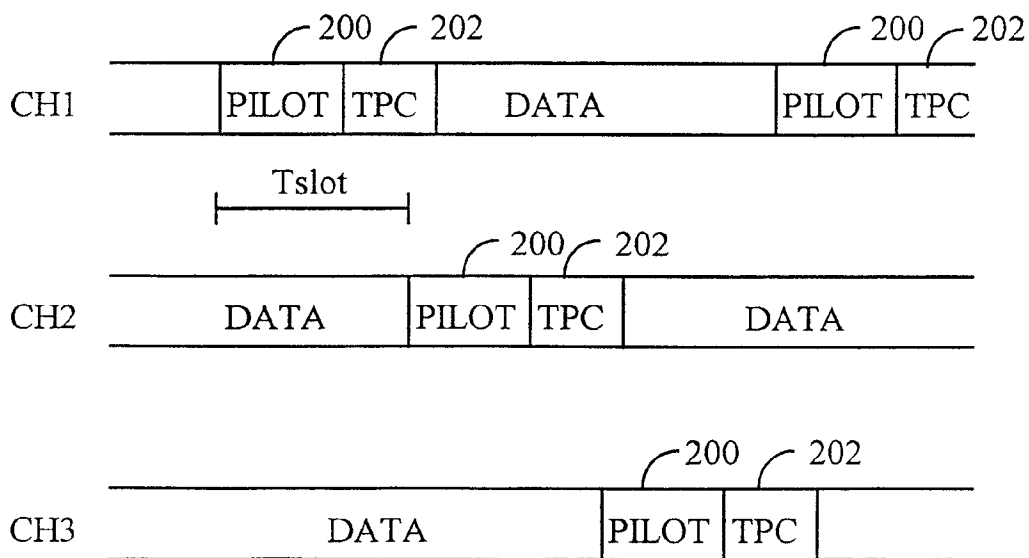


FIG. 2

2/2

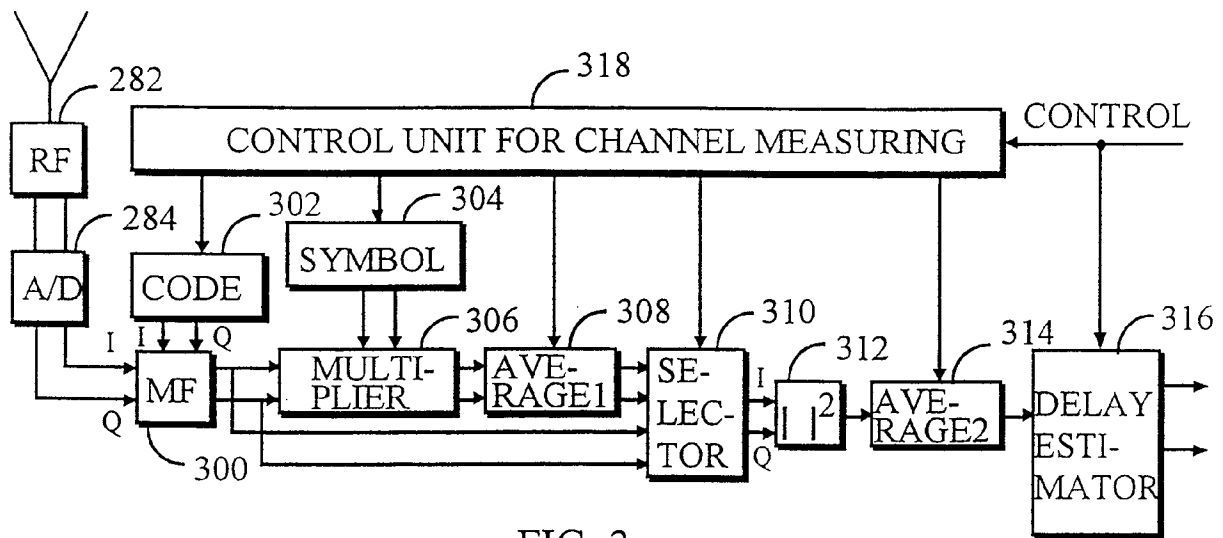


FIG. 3

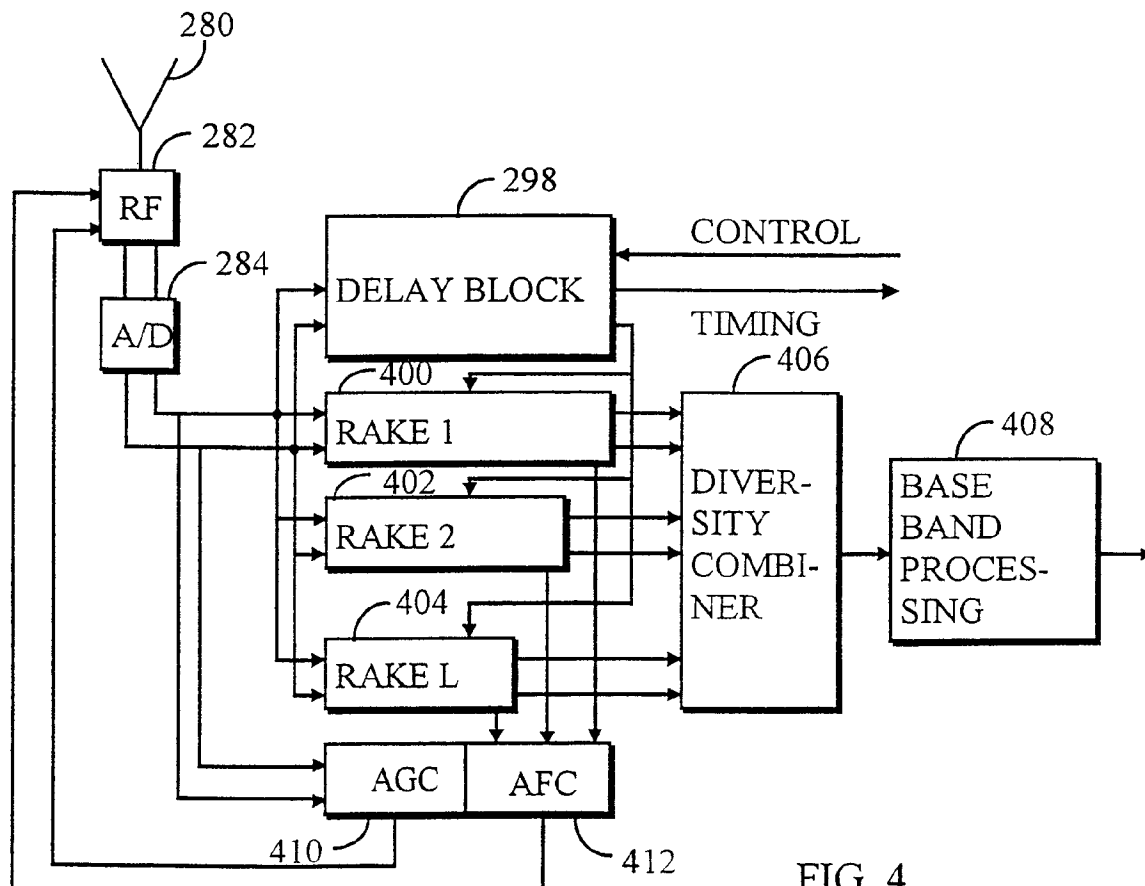


FIG. 4